



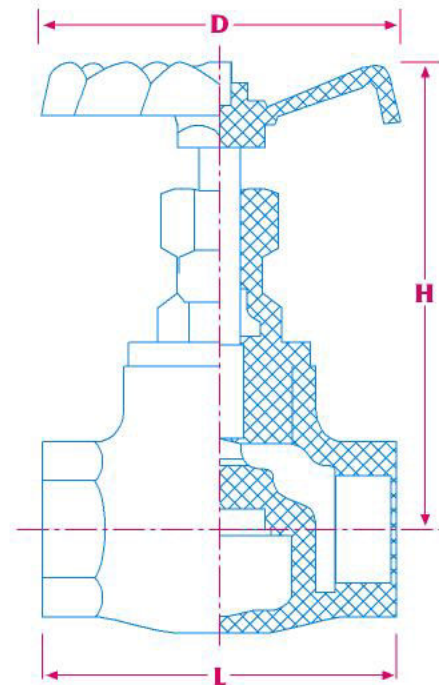

## Globe Valve Screwed End

Model: DGL-S-10K

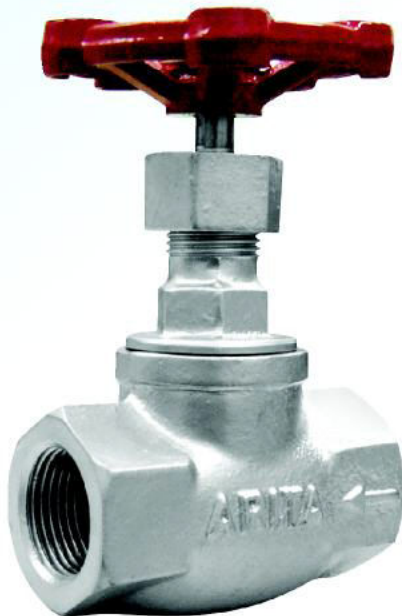

### Materials

Parts	Materials
Body	FCD 45
Bonnet	FCD 45
Disc	SUS 410
Stem	SUS 410
Packing nut	FCD 45
Packing	Graphite
Body seat ring	SUS 410
Handwheel	FCD 45

### Working Pressure

Steam, Oil & Air at 220°C or below	10 kgf/cm <sup>2</sup>
Non-Shock Water at 120°C or below	14 kgf/cm <sup>2</sup>

### Hydrostatic Test Pressure

Shell	20 kgf/cm <sup>2</sup>
Seat	15 kgf/cm <sup>2</sup>

- Connecting threads screwed ends to BS 21 taper threads (BSPT) basically, ANSI B 2.1 (NPT) are available when required.

### Dimensions

SIZE	mm						
	inch	½	¾	1	1¼	1½	2
	mm	15	20	25	32	40	50
L Threaded end to end		65	80	90	105	120	140
H Height		87	100	123	140	154	180
D Handwheel Diameter		71	71	86	86	137	137